



ELITE PENCIL GAUGE 20490

WITH PRESSURE AIRLOCK TECHNOLOGY



- 10–120 PSI
- EASY TO USE
- ACCURATE PRESSURE READING



Take air pressure innovation to the next level. With Slime's Pressure Airlock Technology™, our dual stage patent pending seal locks in air to get the most accurate tire pressure reading every time!



LOCKS IN AIR

AVAILABLE FEB 2021

Elite Pencil Gauge w/ Valve Caps			
PART# 20490		REV092220ART* / REV A**	
	EA.	DIMENSIONS	UPC/CASE CODE
UNIT	1	0.798" H × 3.125" W × 8.500" D • 0.110 LBS	716281510748
INNER	6	3.438" H × 4.938" W × 8.688" L • 0.787 LBS	10716281510745
MASTER	144	14.375" H × 15.125" W × 17.688" L • 20.227 LBS	20716281510742


ITW Global Tire Repair • 125 Venture Drive, Suite 210, San Luis Obispo, CA 93401 • PHONE: 805.489.0490 • FAX: 805.489.1920
 ITW Global Tire Repair, GmbH • Carl-Benz Str. 10, 88696, Owingen, Germany • PHONE: +49-7551-9200-0 • FAX: +49-7551-9200-990



ELITE PENCIL GAUGE 20490 SPEC SHEET

CONTAINS:

- One (1) Pencil Tire Gauge 0.925in. x 0.925in. x 6.25in. (23.5mm x 23.5mm x 158mm)
- Four (4) Plastic Valve Caps 0.377in. x 0.377in. x 0.5in. (9.57mm x 9.57mm x 12.7mm)

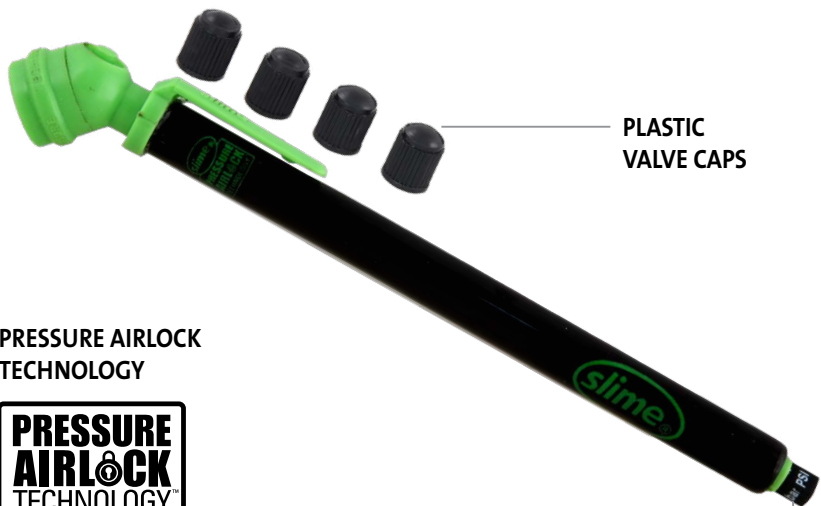

PLASTIC VALVE CAPS

PRESSURE AIRLOCK TECHNOLOGY



PSI/BAR/KPA

LINKS

[PRODUCT WEB PAGE](#)


[SDS SHEET \(N/A\)](#)

[HI RES IN & OUT OF PACKAGE SHOTS, 6-SIDED PHOTOS, INSTRUCTIONS & UPC](#)

[VIDEOS \(N/A\)](#)

[PRODUCT WARRANTY](#)

PART#20490



WARNING: Cancer & Reproductive Harm - www.P65Warnings.ca.gov


ADDITIONAL SET UP INFO

HTS CODE: 9026.20.8000

COUNTRY OF ORIGIN: CHINA

PALLET INFORMATION:

- CASES PER LAYER (TIE): 6
- LAYERS PER LOAD (HIGH): 3
- MASTER CASES PER PALLET: 18
- INNER CASE PER PALLET: 432
- EACHES PER PALLET: 2592



*ART REVISION CHANGES:
REV092220 • Initial Release.

**REVISION CHANGES:
REV A • Initial Release.

ITW Global Tire Repair • 125 Venture Drive, Suite 210, San Luis Obispo, CA 93401 • PHONE: 805.489.0490 • FAX: 805.489.1920
ITW Global Tire Repair, GmbH • Carl-Benz Str. 10, 88696, Owingen, Germany • PHONE: +49-7551-9200-0 • FAX: +49-7551-9200-990